

9.2.

1. There is two mode setting about "lights combination" as below:

4 lights combination:

Set "M 2*2" mode on master light. Other slave lights set it SL-2, SL-3, SL-4 separately.

16 lights combination:

Set "M 4*4" mode on master light. Other slave lights set it from SL-2 to SL-16 separately.

2. "DMX combination" setting mode:



Set all lights DMX channel to be "100CH". Set the DMX address of first light is 1, second light is 101, the third light is 201, and so on.

USER MANUAL

MATRIX PANEL 5x5

BEAM WHITE

Please read carefully before use. * Check www.light-inc.nl for more information.

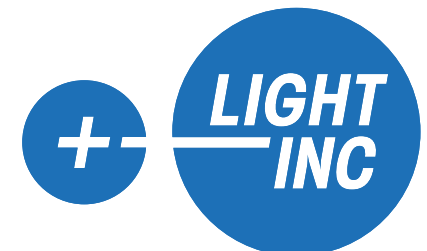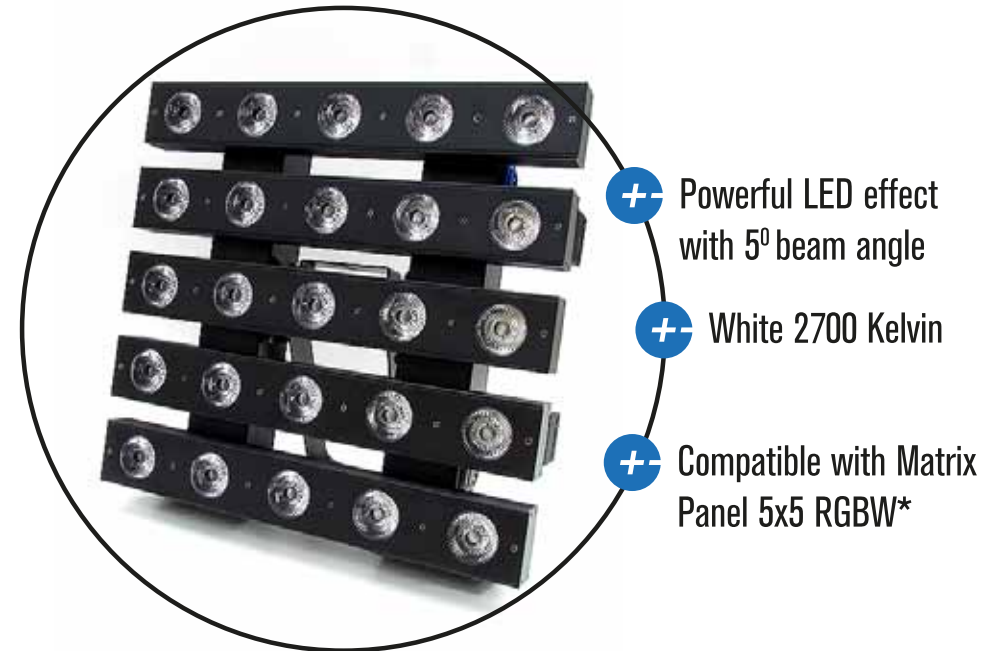

WWW.LIGHT-INC.NL